

RADIO MODULE
MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Supports the follow parts:

MXR-722

PRELIMINARY

DATA SHEET

Radios, Inc.


May 2, 2006 Preliminary Data Sheet

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

The MXR-722 is an FSK/FM/ASK transceiver designed to operate in low-power multi-channel programmable or single-channel stand-alone, half-duplex data transmission systems. It can be used for ISM, SRD, or any other application operating in the frequency range of 300 MHz to 930 MHz.

The MXR-722 consists of a low-noise amplifier (LNA), mixer, IF amplifier, peak detector, phase-frequency detector (PFD), charge pump (CP), and power amplifier (PA).

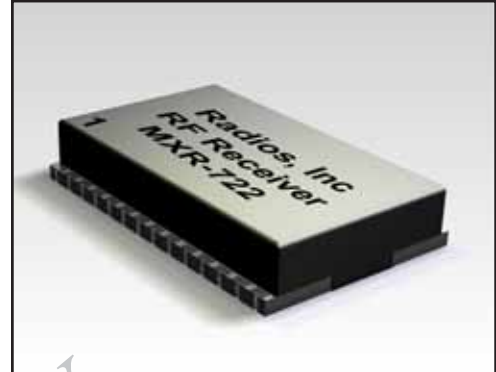

Key Features

- PLL-stabilized RF VCO (LO)
- FSK for digital data and FM reception for analog signal transmission
- Low current consumption in active mode and very low standby current
- ASK detection with or without peak detector
- RSSI allows signal strength indication and ASK detection
- Automatic PA turn-on after PLL lock
- ASK modulation achieved by PA on/off keying
- Power supply range: 2.5V - 16V
- Maximum data rate: 40 kbit/s NRZ
- Frequency range: 300 - 930 MHz in programmable user mode

Typical Applications

- Low-power telemetry
- Alarm and security systems
- Garage door openers
- Home automation
- Remote keyless entry
- Tire pressure monitoring system
- Intelligent remote control
- General bi-directional half duplex digital data transmission or analog signal transmission

PRODUCT ORDER INFORMATION

Part Number	Description
MXR-722(D)(S)	TH7122 FSK/FM/ASK Module Transceiver


Contact Information

Radios, Inc. P.O. Box 1304 North Wales, PA 19454	Phone: 215-362-1899 Fax: 215-362-2214 Email: sales@radiosinc.com
--	--

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Mechanical and Pin Diagram

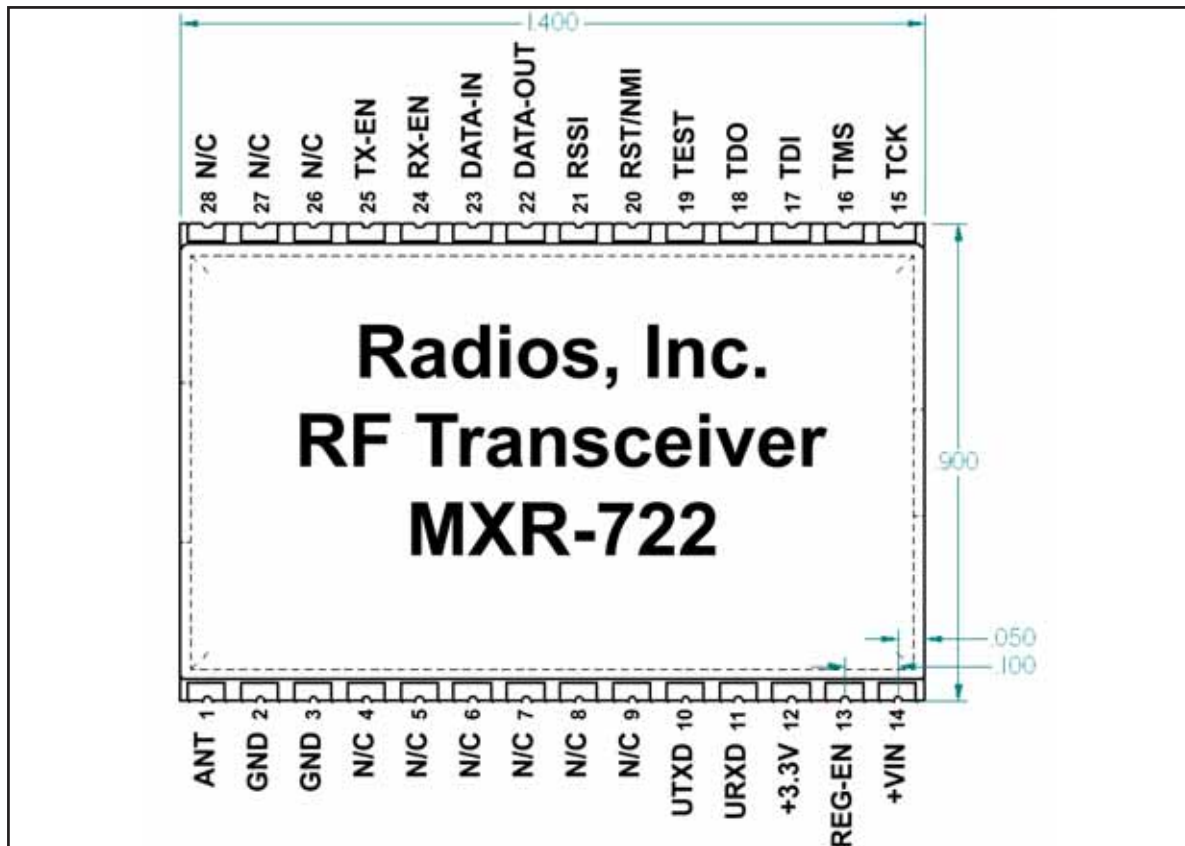

Pin Description

Pin Num	Pin Name	Description	Pin Num	Pin Name	Description
Pin 1	Ant	RF Input/Output	Pin 15	TCK	Test Clock
Pin 2	Gnd	Ground	Pin 16	TMS	Test Mode
Pin 3	Gnd	Ground	Pin 17	TDI	Test Data Input
Pin 4	N/C	No Connect	Pin 18	TDO	Test Data Output
Pin 5	N/C	No Connect	Pin 19	TEST	Selects Test Mode
Pin 6	N/C	No Connect	Pin 20	RST/NMI	Reset/Nonmaskable Interrupt Input
Pin 7	N/C	No Connect	Pin 21	RSSI	RSSI Output
Pin 8	N/C	No Connect	Pin 22	DATA-OUT	OA Output
Pin 9	N/C	No Connect	Pin 23	DATA-IN	ASK/FSK Modulation Data Input
Pin 10	UTXD	UART Transmit Data Out	Pin 24	RX-EN	Receive Enable Input
Pin 11	URXD	UART Receive Data In	Pin 25	TX-EN	Transmit Enable Input
Pin 12	+3.3V	Regulated Output	Pin 26	N/C	No Connect
Pin 13	REG-EN	Regulator Enable	Pin 27	N/C	No Connect
Pin 14	+VIN	Positive Supply Pin	Pin 28	N/C	No Connect

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Electrical Limits

Sym	Parameters	Min	Typ	Max	Unit	Notes
Absolute Maximum Ratings						
VDD	Supply Voltage	-20		20	V	
	Storage Temperature Range	-40		125	°C	
	Lead Temperature		260		°C	
V _{EN}	Enable Input Voltage	-20		+20	V	
Operating Ratings						
	Supply Voltage	2.5		16	V	
V _{EN}	Enable Input Voltage	0		TBD	V	
TA	Ambient operating temperature	-40		85	°C	

Electrical Characteristics

This device is ESD sensitive. Do not operate or store near strong electrostatic fields. Use appropriate ESD precautions. All voltages are with respect to Ground.

Parameters	Test Conditions	Min	Typ	Max	Unit
Operating Conditions					
Input Low Voltage	DATA-IN, RX-EN, TX-EN pins			0.3V _{CC}	V
Input High Voltage	DATA-IN, RX-EN, TX-EN pins	0.7V _{CC}			V
Transmit Frequency Range		300		930	MHz
Receive Frequency Range		300		930	MHz
VCO Frequency		300		930	MHz
IF Range	Receive Freq - VCO Freq	0.4		22	MHz
RO Frequency		3		12	MHz
PFD Working Frequency		0.01		1	MHz
Frequency Deviation	at FSK or FM	±8		±80	kHz
FSK Data Rate	NRZ			40	kbit/s
ASK Data Rate	NRZ			40	kbit/s
FM Bandwidth				10	kHz
VCO Gain	433.92 MHz	14		23	MHz
	868.3 MHz	28		55	MHz
DC Characteristics					
Standby Current	standby mode		50	100	nA
Idle Current	Note 4		0.3		mA
	< 500 MHz, Note 5		3.5		mA
	> 500 MHz, Note 5		6.3		mA
Receive Supply Current - ASK	< 500 MHz, Mode = receive		6.1		mA
	> 500 MHz, Mode = receive		8.9		mA
Receive Supply Current - FSK	< 500 MHz, Mode = receive		6.7		mA
	> 500 MHz, Mode = receive		9.5		mA
Transmit Supply Current @ P _{max} -20dB	< 500 MHz, Mode = transmit, TXPOWER=00		11.5		mA
	> 500 MHz, Mode = transmit, TXPOWER=00		15.5		mA
Transmit Supply Current @ P _{max} -12dB	< 500 MHz, Mode = transmit, TXPOWER=01		12.2		mA
	> 500 MHz, Mode = transmit, TXPOWER=01		16.4		mA
Transmit Supply Current @ P _{max} -6dB	< 500 MHz, Mode = transmit, TXPOWER=10		14		mA
	> 500 MHz, Mode = transmit, TXPOWER=10		17.5		mA
Transmit Supply Current @ P _{max}	< 500 MHz, Mode = transmit, TXPOWER=11		20		mA
	> 500 MHz, Mode = transmit, TXPOWER=11		24		mA

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Electrical Characteristics - CONT.

PLL Synthesizer Timings					
Channel Switching Time - Wide Band	Bpll = 20kHz, Icp = 260 μ A		200		μ S
Channel Switching Time - Wide Band	Bpll = 20kHz, Icp = 260 μ A		500		μ S
TX - RX Switching Time	IF = 10.7MHz		1		mS
AC System Characteristics of Receiver					
Input Sensitivity - ASK	433.92MHz, Note 6		-96		dBm
	868.3MHz, Note 6		-96		dBm
Input Sensitivity - FSK	433.92MHz, Note 6		-87		dBm
	868.3MHz, Note 6		-87		dBm
Maximum Input Signal - ASK	433.92MHz, Note 6		-10		dBm
	868.3MHz, Note 6		-10		dBm
Maximum Input Signal - FSK	433.92MHz, Note 6		-10		dBm
	868.3MHz, Note 6		-10		dBm
Start-up Time - ASK	from standby to receive mode		1	1.5	mS
Start-up Time - FSK	from standby to receive mode		1	1.5	mS
Spurious Emission	referred to receiver input		-54		dBm
AC System Characteristics of Transmitter					
Output Power @ Pmax - 20dB	433.92MHz, TXPOWER = 00		-10		dBm
	868.3MHz, TXPOWER = 00		-14		dBm
Output Power @ Pmax - 12dB	433.92MHz, TXPOWER = 01		-2		dBm
	868.3MHz, TXPOWER = 01		-6		dBm
Output Power @ Pmax - 6dB	433.92MHz, TXPOWER = 10		3		dBm
	868.3MHz, TXPOWER = 10		-1		dBm
Output Power @ Pmax	433.92MHz, TXPOWER = 11		10		dBm
	868.3MHz, TXPOWER = 11		8		dBm
FSK Deviation		± 8	± 25	± 80	kHz
FM Deviation			± 6		kHz
Modulation Frequency FM				10	kHz
PLL Reference Spurious Emission				-40	dBm
Harmonic Emission				-36	dBm
Start-up Time	from standby to transmit mode		1	1.5	mS
ENABLE Input					
Enable Input Logic-Low Voltage(V _{IL})	regulator shutdown			0.4	V
				0.18	V
Enable Input Logic-High Voltage(V _{IH})	regulator enabled	2.0			V
Enable Input Current	V _{IL} </= 0.4V	2	5	0.01	μ A
	V _{IL} </= 0.18V			-2	μ A
	V _{IH} = 2.0V			20	μ A
	V _{IH} = 2.0V			25	μ A

Note 1. Exceeding the absolute maximum rating may damage the device.

Note 2. The device is not guaranteed to function outside its operating rating.

Note 3. Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

Note 4. Mode = idle; IDLESEL = 0

Note 5. Mode = idle; IDLESEL = 1

Note 6. Bif = 150kHz, Fm = 2kHz, BER <= 3 * 10⁻³

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Product Warranty and Disclaimer Information:

Radios, Inc. is dedicated to providing its customers with the best possible products, and is continually working on improving the quality and function of its entire product line. Therefore, Radios, Inc. reserves the right to make changes to the design, specifications, or manufacturing of its products without notice. The information contained in this data sheet is believed to be complete, accurate, and reliable as of the time of publication. Because product specifications are based on representative lot samples, however, values can vary from lot to lot and are not guaranteed. Radios, Inc. does not assume any liability or responsibility arising from the application or use of any product described herein, and makes no guarantee, warranty, or representation regarding the suitability or legality of any product for use in a specific application. Radios, Inc. does not assume any liability for any infringement of patents or other rights of third parties which may result from the use of its products. No product sold by Radios, Inc. is intended for use in a life critical application, or an application where the safety of property is at risk. The user assumes full and complete responsibility for any use of Radios, Inc.'s products in an application where the safety of life or property is at stake.

A product can be returned directly to Radios, Inc. for evaluation. All returns must have a valid RMA number attached. RMA numbers can be obtained by calling customer service at Radios, Inc. If a product is found to be defective and is returned within 90 days of purchase, Radios, Inc. may repair or replace, at its option, said defective product. This warranty does not apply to products which have been disassembled, modified, or subjected to conditions exceeding the application specifications. Under no conditions will Radios, Inc. be responsible for losses arising from the use or failure of a device in any application or for losses arising from failure to meet delivery requirements, other than the repair, replacement, or refund limited to the original product purchase price. No other warranties, express, implied, or statutory, including warranty of fitness for a particular purpose, apply.

MXR-722

FSK/FM/ASK TRANSCEIVER MODULE

Technical Support:

Radios Inc. is committed to providing its customers with excellent technical support and the resources necessary to assist its customers with their product development. Customers have several options to obtain assistance. First, any questions or concerns can be e-mailed to Radios Inc. at information@radiosinc.com. We monitor our e-mail daily, and will respond to all questions promptly. Additionally, to speak directly to a technical support representative, customers may call Radios Inc. at 215-362-1899.

Copyright:

Radios Inc. reserves the right to all proprietary or commercial information contained in this data sheet. This data sheet is protected by copyright, and any unauthorized copying, reproduction, or dissemination is strictly prohibited without the prior written approval of Radios Inc.

Editorial Information:

	(Date)
Last Updated	May 2, 2006PRELIMINARY